



ILLUMINATOR™

2,000-LUMEN RECHARGEABLE LED WORKLIGHT



41926

OPERATOR'S MANUAL

CAUTION: To Reduce The Risk Of Injury, User Must Read And Understand Operator's Manual. Save These Instructions For Future Reference.

TABLE OF CONTENTS

General Safety Information.....	Page 1
Work Area Safety.....	Page 1
Electrical Safety.....	Page 1
Personal Safety.....	Page 1
Power Tool Use and Care.....	Page 2
Service.....	Page 2
Battery Safety.....	Page 2
Charger Safety.....	Page 3
Safety Warning for Work Light.....	Page 3
Specifications.....	Page 3
Parts List.....	Page 3
Operation.....	Page 4
Warranty.....	Page 5

GENERAL POWER TOOL SAFETY WARNINGS

WARNING:

Read all safety warnings and instructions. Failure to follow the warnings and instructions may result in electric shock, fire and/or serious injury. The term "power tool" in the warnings refers to your mains-operated (corded) power tool or battery-operated (cordless) power tool.

WORK AREA SAFETY

- a) **Keep work area clean and well lit.** Cluttered or dark areas invite accidents.
- b) **Do not operate power tools in explosive atmospheres, such as in the presence of flammable liquids, gases or dust.**
Power tools create sparks which may ignite the dust or fumes.
- c) **Keep children and bystanders away while operating a power tool.** Distractions can cause you to lose control.

ELECTRICAL SAFETY

- a) **Power tool plugs must match the outlet. Never modify the plug in any way. Do not use any adapter plugs with earthed (grounded) power tools.**
Unmodified plugs and matching outlets will reduce risk of electric shock.
- b) **Avoid body contact with earthed or grounded surfaces, such as pipes, radiators, ranges, and refrigerators.**
There is an increased risk of electric shock if your body is earthed or grounded.
- c) **Do not expose power tools to rain or wet conditions.**
Water entering a power tool will increase the risk of electric shock.
- d) **Do not abuse the cord. Never use the cord for carrying, pulling or unplugging the power tool. Keep cord away from heat, oil, sharp edges or moving parts.**
Damaged or entangled cords increase the risk of electric shock.
- e) **When operating a power tool outdoors, use an extension cord suitable for outdoor use.**
Use of a cord suitable for outdoor use reduces the risk of electric shock.
- f) **If operating a power tool in a damp location is unavoidable, use a residual current device (RCD) protected supply.**
Use of an RCD reduces the risk of electric shock.

PERSONAL SAFETY

- a) **Stay alert, watch what you are doing, and use common sense when operating a power tool. Do not use a power tool while you are tired or under the influence of drugs, alcohol or medication.**
A moment of inattention while operating power tools may result in serious personal injury.
- b) **Use personal protective equipment. Always wear eye protection.**
Protective equipment such as dust masks, non-skid safety shoes, hard hats, or hearing protection used for appropriate conditions will reduce personal injuries.
- c) **Prevent unintentional starting. Ensure the switch is in the off-position before connecting to power source and/or battery pack, picking up or carrying the tool.**
Carrying power tools with your finger on the switch or energizing power tools that have the switch on invites accidents.

PERSONAL SAFETY

d) Remove any adjusting key or wrench before turning the power tool on.

A wrench or a key left attached to a rotating part of the power tool may result in personal injury.

e) Do not overreach. Keep proper footing and balance at all times.

This enables better control of the power tool in unexpected situations.

f) Dress properly. Do not wear loose clothing or jewelry. Keep your hair, clothing and gloves away from moving parts.

Loose clothes, jewelry or long hair can be caught in moving parts.

g) If devices are provided for the connection of dust extraction and collection facilities, ensure these are connected and properly used.

Use of dust collection can reduce dust-related hazards.

POWER TOOL USE AND CARE

a) Do not force the power tool. Use the correct power tool for your application.

The correct power tool will do the job better and safer at the rate for which it was designed.

b) Do not use the power tool if the switch does not turn it on and off.

Any power tool that cannot be controlled with the switch is dangerous and must be repaired.

c) Disconnect the plug from the power source and/or the battery pack from the power tool before making any adjustments, changing accessories, or storing power tools.

Such preventive safety measures reduce the risk of starting the power tool accidentally.

d) Store idle power tools out of the reach of children and do not allow persons unfamiliar with the power tool or these instructions to operate the power tool.

Power tools are dangerous in the hands of untrained users.

e) Maintain power tools. Check for misalignment or binding of moving parts, breakage of parts, and any other condition that may affect the power tools operation. If damaged, have the power tool repaired before use.

Many accidents are caused by poorly maintained power tools.

f) Keep cutting tools sharp and clean.

Properly maintained cutting tools with sharp cutting edges are less likely to bind and are easier to control.

g) Use the power tool, accessories and tool bits etc. in accordance with these instructions, taking into account the working conditions and the work to be performed.

Use of the power tool for operations different from those intended could result in a hazardous situation.

SERVICE

a) Have your power tool serviced by a qualified repair person using only identical replacement parts.

This will ensure that the safety of the power tool is maintained.

BATTERY SAFETY

1. Never attempt to open for any reason.
2. Do not store in locations where the temperature may exceed 40 °C.
3. Charge only at ambient temperatures between 4 °C and 40 °C.
4. Charge only using the charger provided with the tool.
5. Do not cause short circuits. If connection is made between the positive (+) and negative (-) terminal directly or via accidental contact with metallic objects, the battery is short circuited and an intense current will flow causing heat generation which may lead to casing rupture or fire.
6. Do not heat. If batteries are heated to above 100 °C, sealing and insulating separators and other polymer components may be damaged resulting in electrolyte leakage and/or internal short circuiting leading to heat generation causing rupture or fire. Moreover, do not dispose of the batteries in fire, as explosion and/or intense burning may result.
7. Under extreme conditions, battery leakage may occur. When you notice liquid on the battery, proceed as follows:
 - Carefully wipe the liquid off using a cloth. Avoid skin contact.
8. In case of skin or eye contact, follow the instructions below:
 - In case of eye contact, rinse abundantly with clean water for at least 10 minutes. Consult a physician.

 **FIRE HAZARD!** Avoid short-circuiting the contacts of a detached battery. Do not incinerate the battery.

CHARGER SAFETY

1. Use the provided charger to charge the battery only.
2. Never attempt to charge non-rechargeable batteries.
3. Have defective cords replaced immediately.
4. Do not expose to water.
5. Do not open the charger.
6. Do not probe the charger.
7. The charger is intended for indoor use only.

SAFETY WARNING FOR WORK LIGHT

1. This light is not a toy; therefore, children should not operate it.
2. All electronic parts are fixed, so it is unnecessary to open or change the work light.
3. Do not attempt to replace or change the diode lights. If the protective glass is cracked or broken, then it must be replaced before the work light can be used again. Contact a professional electrician for repairs.

SPECIFICATIONS

Description	Data
Charging voltage:	AC 100-240V, 50~60Hz, .0.6A
Lithium battery:	11.1V DC 4400mAh
Charger Output:	DC 12.6V 1.8A
Charging time:	~4hrs (Depending on battery and charging condition)
Run Time:	~2.5hrs on High, 8hrs on Low
Output Power:	20 Watts
Brightness:	Max: 2000 Lumens, Min: 700 Lumens
Color Temperature:	6500K

PARTS LIST

PART #	DESCRIPTION	QTY	PART #	DESCRIPTION	QTY
1	TPR BUMPER	1 pcs	5	CORD MINDER	1 pcs
2	LENS	1 pcs	6	ON/OFF SWITCH	1 pcs
3	STAND/CARRYING HANDLE	1 pcs	7	CHARGING SOCKET	1 pcs
4	LIGHT BODY	1 pcs	8	PROTECTIVE CAP	1 pcs

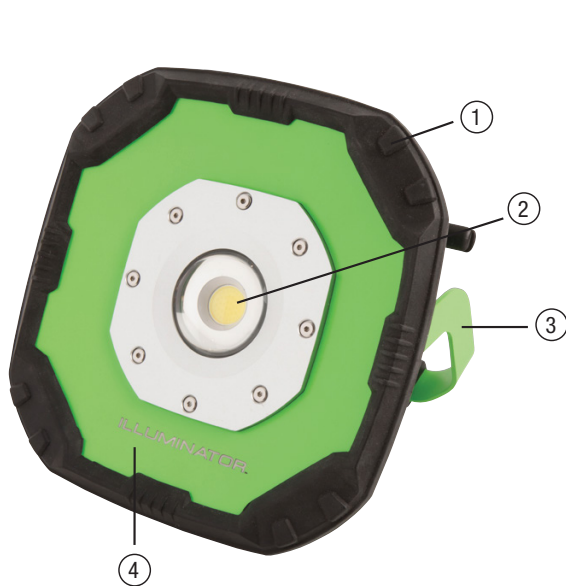


FIG 1



FIG 2

OPERATION



FIG 3



FIG 4

1. Open the protective cap (Part 8) and push the plug into charging socket (Part 7).
2. Plug the adapter into a suitable outlet. Do not use an extension cord. The light on the adapter (Part A) turns red to show that the battery is charging.
3. When charging is completed, the light will change from red to green.
4. Light can also be used during recharging cycle as a corded work light.

NOTE: Place the protective cap back onto the charging socket to prevent dust or water from entering.

ADJUSTING THE STAND

The stand (Part 3) is easily adjusted by tilting either up or down depending on your needs.

NOTE: To avoid damaging the stand, do not over-extend the range at which it can tilt.



FIG 5

ON/OFF SWITCH

The work light is equipped with an ON/OFF switch button (Part 6) that is located at the back, which can adjust the brightness.

- Press the button once: 25% brightness;
- Second press: 100% brightness;
- Third press: Light turns off.

⚠ WARNING:

Do not stare directly at the light beam. Never aim the beam at any person or object other than the area you need lit.

MAINTENANCE

Your work light requires very little care and maintenance. Simply clean the lens regularly with a non-abrasive cleaner. Store in a dry and frost-free place; the ambient temperature should not exceed 40°C.

⚠ WARNING:

Always make sure the work light is off and completely cool before attempting to clean it.

Do not dispose of electrical appliances as unsorted municipal waste; use separate collection facilities. Contact your local government for information regarding the collection systems available. If electrical appliances are disposed of in landfills or dumps, hazardous substances can leak into the groundwater and get into the food chain, damaging your health and well-being.



FIG 6



2,000-LUMEN RECHARGEABLE LED WORKLIGHT

ONE YEAR | LIMITED WARRANTY

This product is backed by a Limited One Year Warranty. This warranty covers manufacturer defects and workmanship. The warranty excludes misuse or abuse and normal wear and tear. Exclusion is not allowed in some states and may not apply. This warranty gives you specific legal rights, and you may have other rights, which vary from state to state.

CALIFORNIA PROPOSITION 65 WARNING: This product contains chemicals known to the State of California to cause cancer, birth defects, or other reproductive harm.

**SAVE YOUR RECEIPTS
THIS WARRANTY IS VOID WITHOUT THEM**